
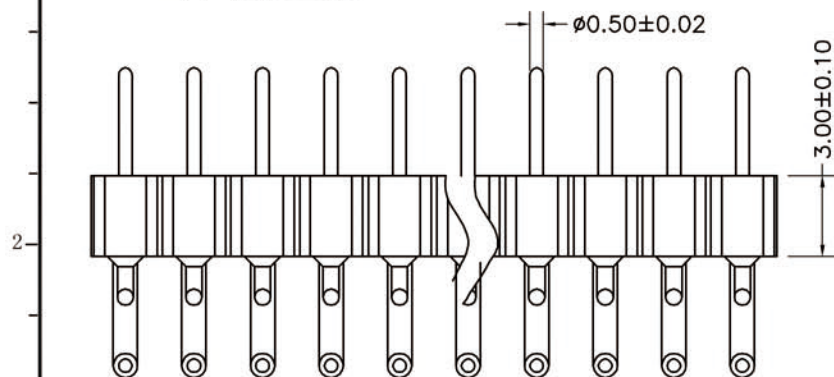
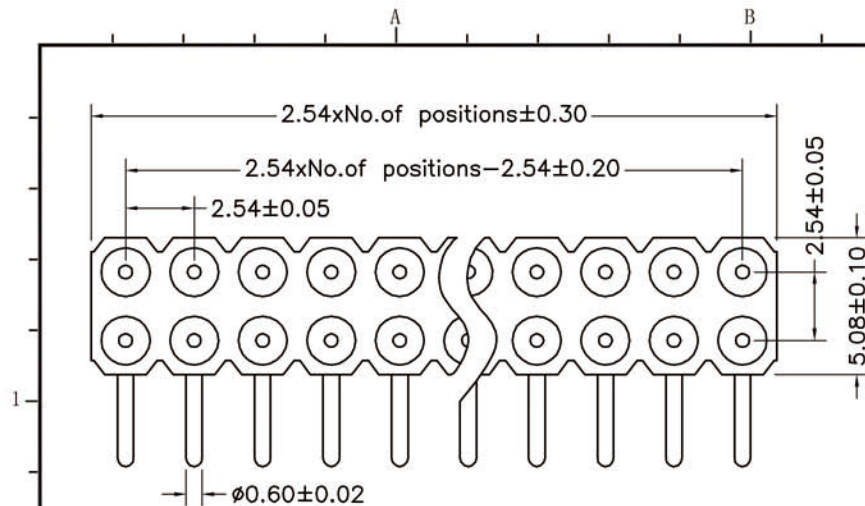


P. C. B LAYOUT

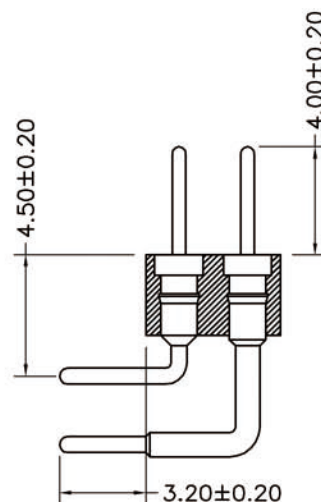

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ NI, $5\mu\text{m}/200\mu$ Sn

Gold Plated: $2\mu\text{m}$ / $80\mu\text{m}$ Ni, 0.8μ gold

Insulator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voltage:60VAC/DC

Mechanical:

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

STOD2-RXXXX1776A