
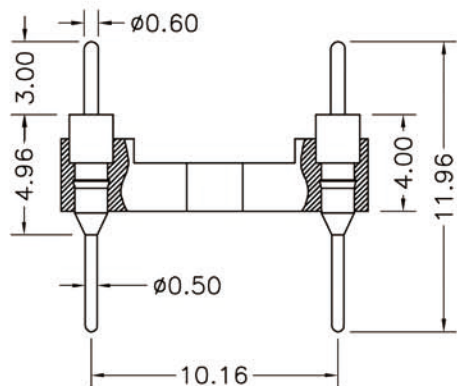


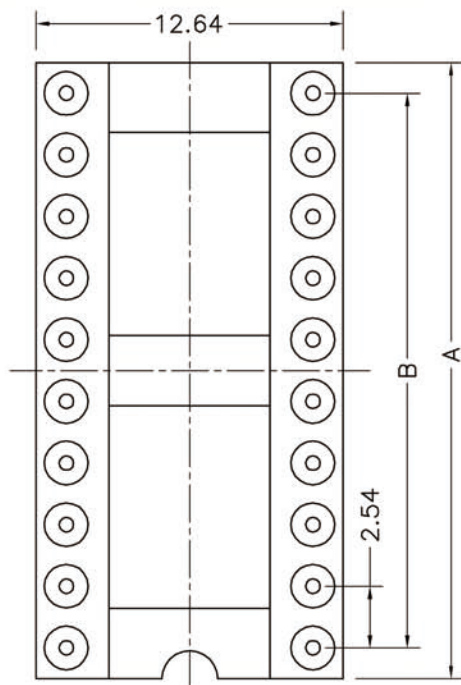

# Technical Data

## Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni, 0. 8μ" gold

Insuiator:PPS UL94V-0

## Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dlelectric Withstanding Voltage:1000V AV Min

Operaling voitage:60VAC/DC

## Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

| Serial number | No. of Positions | PART NO           | A      | B      |
|---------------|------------------|-------------------|--------|--------|
| 12            | 20               | STOD4-I120XX1196A | 25. 4  | 22. 86 |
| 13            | 22               | STOD4-I122XX1196A | 27. 94 | 25. 4  |
| 14            | 24               | STOD4-I124XX1196A | 30. 48 | 27. 94 |
| 15            | 28               | STOD4-I128XX1196A | 35. 56 | 33. 02 |
| 16            | 32               | STOD4-I132XX1196A | 40. 64 | 38. 1  |

### TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名  
日期  
審核  
日期

客戶確認

☐ 承認 日期

☐ 駁回 日期