


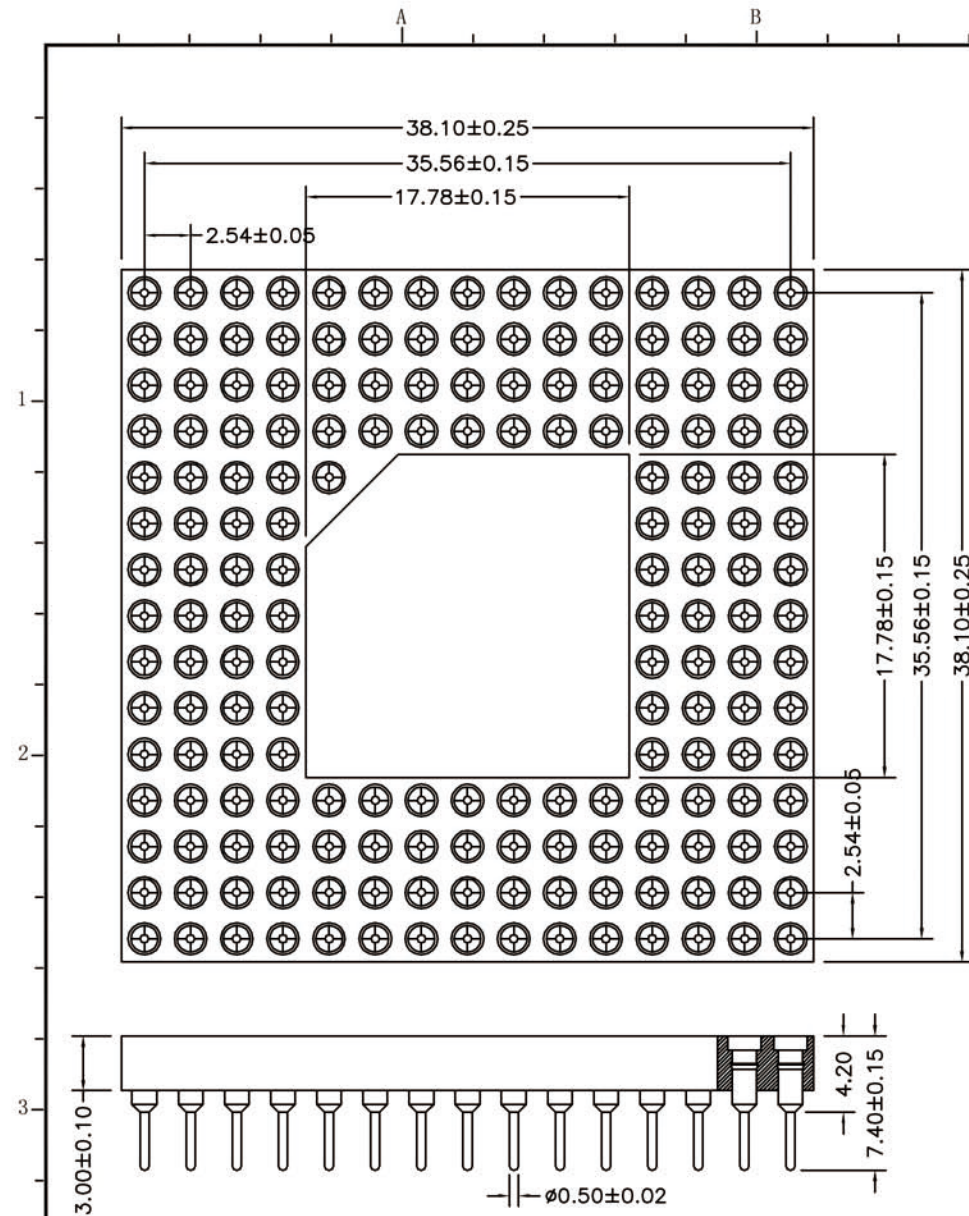

Technical Data

Material:

Pin(outer sleeve): Brass, machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: 2μm/80μm"NI, 5μm/200μ"Sn

Gold Plated: 2μm"/80μm"Ni, 0.8μ" gold

Plating(Contact): 2μm/80μ"NI, gold or Tin plated

Insulator: PPS UL94V-0

Clp(Contact 4 Flnger): Beryllium copper, heat teated

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insuiation resistance: ≥1000MΩ at V=100V

Operaing voitage: 60VAC/DC

Mechanical:

Average Insertion force with steel pin of Ø0.432: <250g

Average withdrawal force with steel pin of Ø0.432: >70g

Mechanical lige cycle: min 200

Operaling temperature: -40 ° C to +105 ° C

Soldering temperature: +255 ° C

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOA-P177XXXX0740B