

ROHS




STO-C0-034

Specifications(规格) :

- Current rating(额定电流): 0.5A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -55°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ

I DC

- Part No. (料号) : 4127IY2*XXBLPTH12S2T
- Poles (PIN数) : 10-100P
- Material (材质) : PBT+30% Glass Fiber (UL94V-0).
Pin针: Phosphor Bronze (磷青铜)
Finish (电镀) : Contact-Plated (接触点镀金)
Bottom-Nickel (底部镀镍)

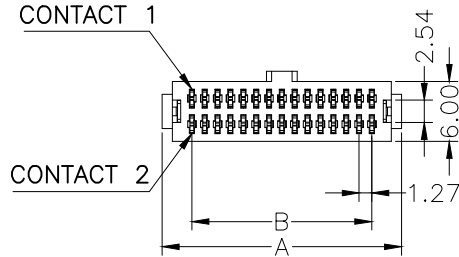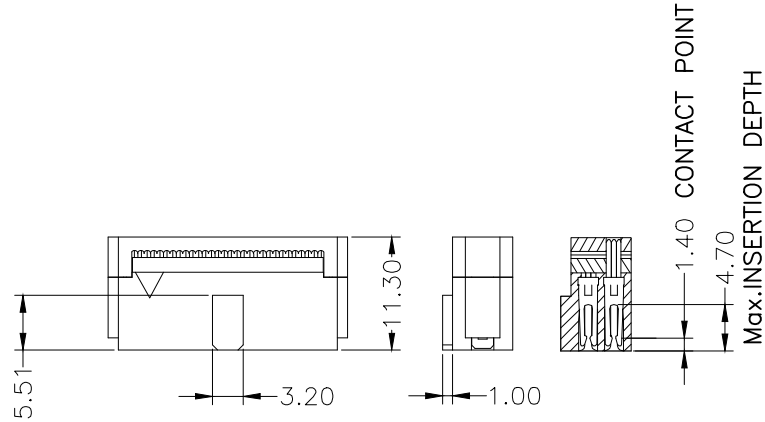

4127 I Y 2*XX BL PT H12 S2- X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①系列

②类别: I-DC类

③外观形态:

Y-有鼻 N- 无鼻

④PIN数:

单排- X X 双排- 2 * X X

⑤颜色:

BL- 蓝色 BK - 黑色

⑥材质:

6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6 L P L 4 6 P 3 6 4 P T 3 0 4 8 B T
T S - 其它

⑦电镀类别: G * * - 镀金 V * * H * 镀全 镀半金

* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "

* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "

N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0 - 1 2 0 U ")

S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银

S W - 镀雾锡 H S - 高温锡

⑧成品的件数

S2-二件式 S3-三件式

⑨空PIN位置及特殊码:

T-T Type

Circuit	Dimension	
	A	B
10	11.08	5.08
16	14.89	8.89
20	17.43	11.43
26	21.24	15.24
34	26.32	20.32
40	30.13	24.13
46	36.48	30.48
60	42.83	36.83
64	45.37	39.37
68	47.90	41.91
80	55.53	49.53
100	68.23	62.23

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.

STO

上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

4127IY2*XXBLPTH12S2T

1.27mm HFC Connector
(T-Type)