


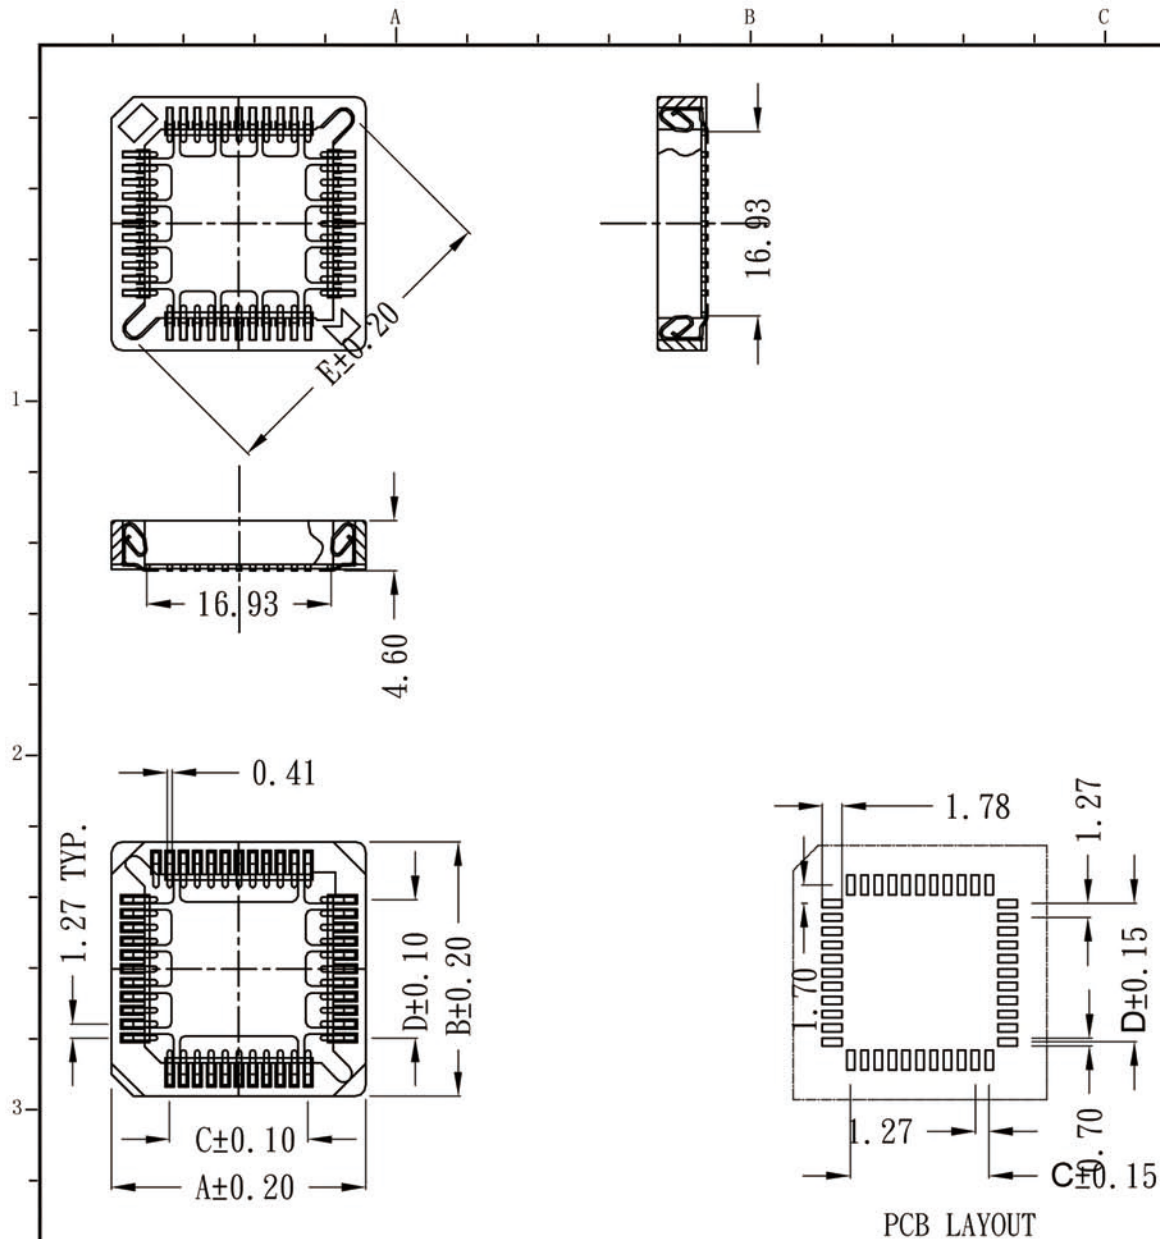

Technical Data

Material:

CONTACT::phosphor brone

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ "NI, $5\mu\text{m}/200\mu\text{m}$ "Sn

Gold Plated: $2\mu\text{m}/80\mu\text{m}$ "Ni, $0.8\mu\text{m}$ " gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:2Amps/contact max.

Contact resistance:max $20\text{m}\Omega$

Insuiation resistance:min $5000\text{M}\Omega$

Dlelectric strength:min 600V RMS

Mechanical:

Contact pressure:min 1.5N per contact

Mechanical life:min 50 cycles

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

NO.OF	A	B	C	D	E
CONIACTS					
44P	23.28	23.28	12.70	12.70	28.30

TOLERANCE:

X. $\pm\text{XXX}$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名

日期

審核

日期

客戶確認

☐ 承認 日期

☐ 駁回 日期

STOA-C144XXX004